


# Axial Ferrite Beads

## Features

- Low cost
- Easy mounting on PC boards
- Available in wide range of values and configuration to meet most application



## Applications

- Waveform correction of digital signals.
- Absorption of high frequency noise from data lines.


## Part Number Systems

**RH - 35 - 60 - 08 - LF**

(1) (2) (3) (4) (5)

(1)	Product series	(2)	Dimension: A
(3)	Dimension: B	(4)	Dimension: C
(5)	ROHs Compliant		

## Shape And Dimensions

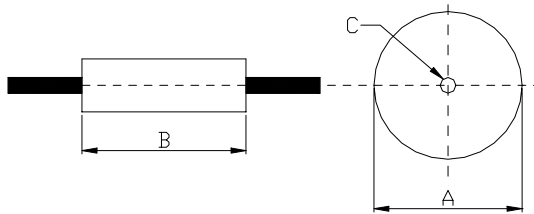

Unit: mm

Type	A	B	C	Type	A	B	C
184008	1.8 ± 0.15	4.0 ± 0.30	0.8 ± 0.15	356008	3.5 ± 0.15	6.0 ± 0.30	0.8 ± 0.15
254508	2.5 ± 0.15	4.5 ± 0.30	0.8 ± 0.15	357508	3.5 ± 0.15	7.5 ± 0.30	0.8 ± 0.15
353008	3.5 ± 0.15	3.0 ± 0.30	0.8 ± 0.15	358008	3.5 ± 0.15	8.0 ± 0.30	0.8 ± 0.15
354508	3.5 ± 0.15	4.5 ± 0.30	0.8 ± 0.15	359008	3.5 ± 0.15	9.0 ± 0.30	0.8 ± 0.15
354708	3.5 ± 0.15	4.7 ± 0.30	0.8 ± 0.15	351208	3.5 ± 0.15	12 ± 0.30	0.8 ± 0.15

## Axial Ferrite Beads

Part Number	Impedance ( $\Omega$ ) Min	
	25 MHz	100 MHz
	RH-184008-LF	15
RH-254508-LF	20	40
RH-353008-LF	25	40
RH-354508-LF	30	60
RH-354708-LF	35	60
RH-356008-LF	50	75
RH-357508-LF	60	90
RH-358008-LF	60	100
RH-359008-LF	80	120
RH-351208-LF	30	130

\* All specifications are subjected to change without prior notice.