
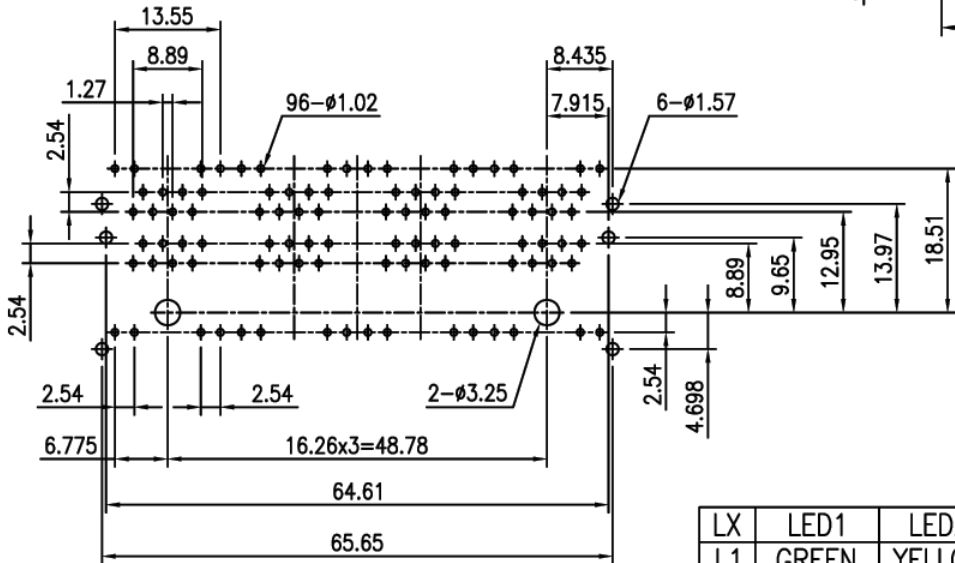
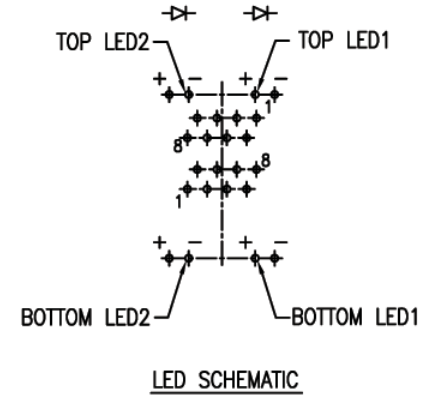
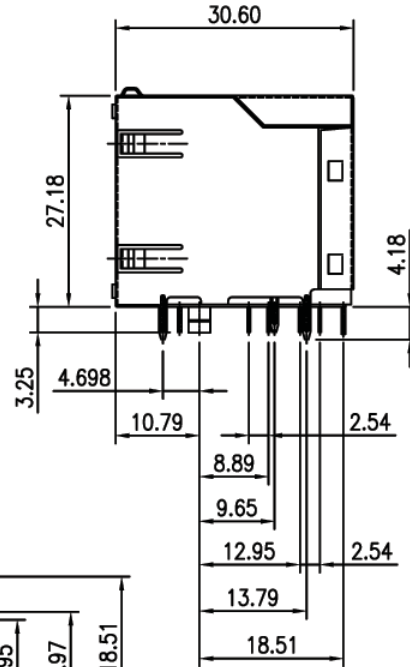


V1.2 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
△				△			
△				△			

****CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!**

084

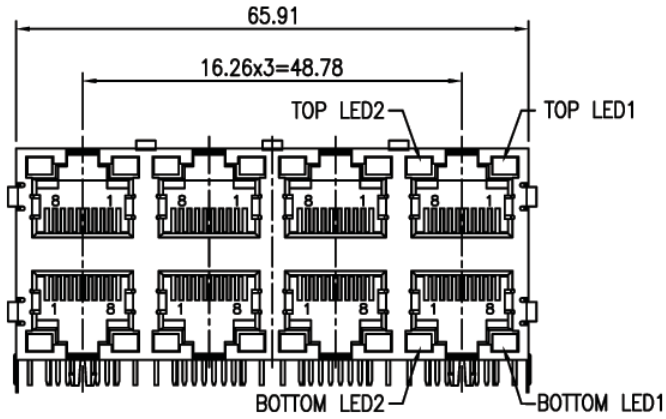

PCB LAYOUT / TOP VIEW

LX	LED1	LED2
L1	GREEN	YELLOW
L2	GREEN	GREEN
L3	YELLOW	GREEN
L5	RED	GREEN
L7	YELLOW	YELLOW

※ LED OPTIONS

MATERIALS:
 HOUSING MATERIAL: ENGINEERING THERMOPLASTIC
 FLAMMBILITY RATING UL 94V-0.
 CONTACTS: 0.46MM DIAMETER ALLOY C5102, GOLD PLATING OVER NICKEL.
 SHIELD: BRASS PLATING NICKEL ALLOY.

ORDER INFORMATION:
 MJK188-Pa881GXsb-8S-LX
 MJK: MODULAR JACK
 188: SERIES NO.
 Pa: TERMINAL TYPE, PCB TYPE, RIGHT ANGLE
 88: NO. OF CONTACT, 8P8C
 1: COLOR OF PLASTIC, BLACK
 GX: CONTACT PLATING
 Gft: GOLD FLUSH ON CONTACT, TIN PLATING ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATING ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATING ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATING ON SOLDER TAIL
 Sb: SHIELDED WITH PANEL GROUNDING TAB
 8: 8 PORTS
 S: STACKED
 LX: LED OPTIONS

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES	DATE	MODEL
DRAWN	AARON	26/JAN/06'	TITLE		MODULAR JACK
CHECKED	WENDY	26/JAN/06'	NO.		MJK188-Pa881G_Sb-8S-L_
APPROVALS					

Machrone