
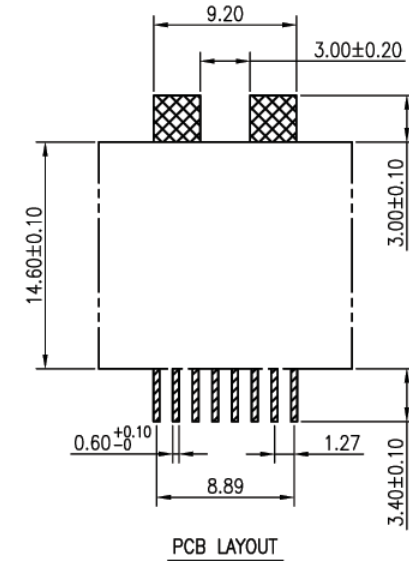
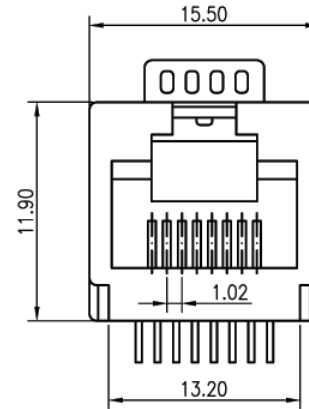
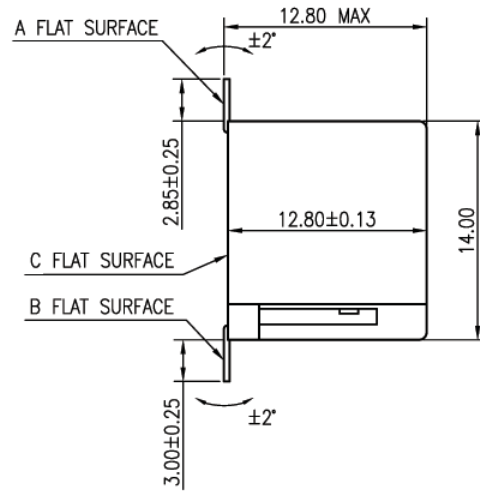


V1.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
△				△			
△				△			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							121

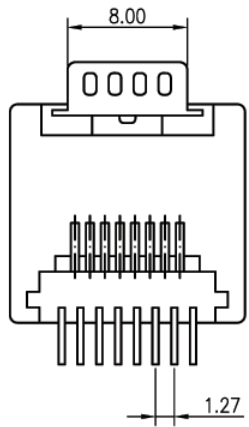

NOTE:

1. A AND B HIGHEST POINT MUST OVER C FLAT SURFACE.
2. THE MAXIMUM DISTANCE (0.15m/m) BETWEEN LOWEST AND HIGHEST ON A AND B FLAT SURFACE.

MATERIALS:

HOUSING: DSM STANYL TE250F6 (NYLON-46)  
 HEAT DEFLECTION TEMP.290°  
 BLACK COLOR, UL 94V-0  
 OR: NYLON ZYTEL FR-52  
 HEAT DEFLECTION TEMP.278°  
 BLACK COLOR, UL 94V-0  
 TERMINAL: 0.35mm THICK PHOS-BRONZE  
 PLATED WITH HARD GOLD AND  
 TIN/LEAD IN SOLDER AREA.  
 HOLD DOWN: 0.35mm THICK COPPER ALLOY,  
 PLATED WITH TIN-LEAD.  
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
 PART 68,SUBPART F.

ORDER INFORMATION:

MJK738-Pt881GX  
 MJK: MODULAR JACK  
 738: SERIES NO.  
 Pt: PCB TYPE, SURFACE MOUNT TYPE,  
 TOP ENTRY  
 88: NO. OF CONTACT, 8P8C  
 1: COLOR OF PLASTIC, BLACK  
 GX: CONTACT PLATING OPTION  
 Gf: GOLD FLASH  
 Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL  
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL  
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL  
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.30			SIGNATURES		DATE	MODEL
SYMBOL	UNIT	SCALE	DRAWN	AARON	15/FEB/06'	TITLE
			CHECKED	CONNIE	15/FEB/06'	NO.
			APPROVALS			
			<b>Machrone</b>			