

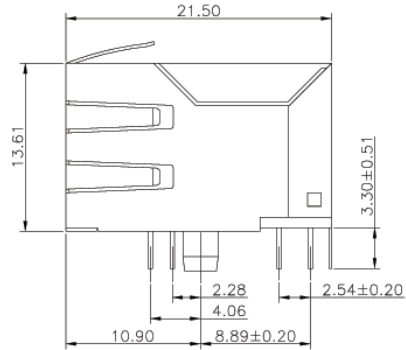


REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
△				△			
△				△			

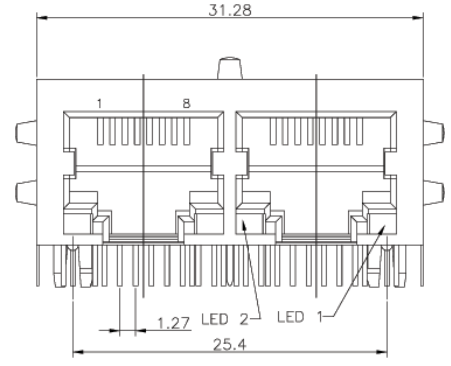


ORDER INFORMATION:
MJK73TE-Pa881GftSb-2-LXB
MJK: MODULAR JACK
73TE: TRANSFORMER TYPE, TYPE E
Pa: PCB TYPE, RIGHT ANGLE TYPE
88: NO. OF CONTACT, 8P8C
1: COLOR OF PLASTIC, BLACK
Gft: GOLD FLASH ON CONTACT,
TIN PLATING ON SOLDER TAIL
Sb: SHIELDED WITH PANEL GROUNDING TAB
2: 2 PORT
LX: LED OPTIONS
B : LED AT BOTTOM

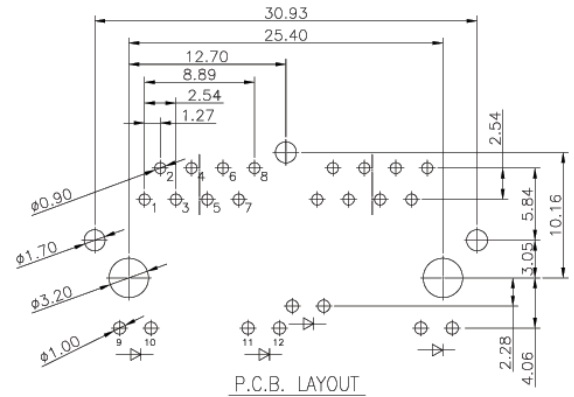

LX	LED1	LED2
L1	GREEN	YELLOW
L2	GREEN	GREEN
L3	YELLOW	GREEN
L5	RED	GREEN
L7	YELLOW	YELLOW

LED OPTIONS

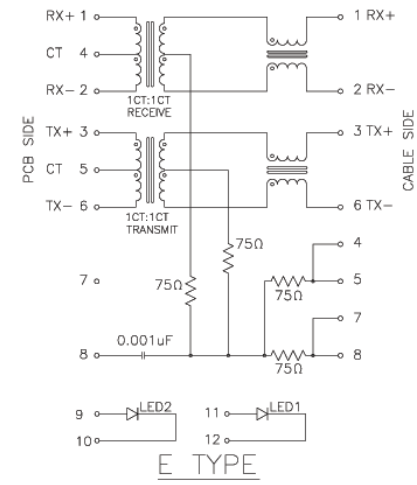

ELECTRICAL SPECIFICATIONS:
TURN RATIO: TRANSMIT=1CT:1CT±5%,RECEIVE=1CT:1CT±5%
350µH MINIMUM COL WITH 8mA BIAS CURRENT
TAB OPTION: DOWN
INSERTION LOSS (dB TYP 0.1-100MHz):-1.2(0.1-100MHz)
RETURN LOSS(dB TYP@100 OHM):
-18dB(1-10MHz),-16dB(30MHz),-12dB(60-80MHz),
CROSS TALK(dB TYP):-40dB(1-10MHz),-35dB(30-60MHz),-30dB(60-100MHz)
COMMON MODE REJECTION (dB TYP): -30(1-50MHz), -20(50-130MHz)
HIPOT TEST):1500Vrms/1MIN.

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.30			SIGNATURES	DATE	MODEL
SYMBOL	UNIT	SCALE	DRAWN Frederick	06/DEC/04'	TITLE
△	mm	3/1	CHECKED Sam	06/DEC/04'	NO. MODULAR-JACK
			APPROVALS		MJK73TE-Pa881GftSb-2-LXB

Machrone