


Multilayer Ferrite Beads

Features

- Handle DC current up to 3Amp, with low DC resistance.
- Suitable for high DC power EMI suppression

Applications

- CD-ROMs
- Hard Drivers
- Modems
- Monitor
- Motherboard
- Printers




Part Number Systems

MBM- 322513 – 0060 - A - LF

(1) (2) (3) (4) (5)

(1)	Product series	(2)	Size
(3)	Nominal Impedance: 0060 = 60 ohm @100MHz	(4)	Material Type
(5)	ROHs Compliant		

Shape And Dimensions

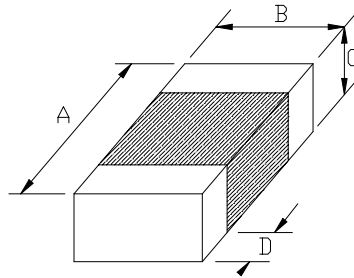

Unit: mm

Type	A	B	C	D
322513	3.2 ± 0.2	2.5 ± 0.2	1.3 ± 0.2	0.6 ~ 1.0


Multilayer Ferrite Beads

MBM-322513(1210)-Series		ELECTRICAL CHARACTERISTICS	
Part Number	Impedance Z (Ω) at 100MHZ ($\pm 25\%$)	DC Resistance (Ω) Max	Rated Current (mA) Max
MBM-322513-0052A-LF	52	0.03	3000
MBM-322513-0030A-LF	60	0.03	3000

* All specifications are subjected to change without prior notice.

Typical Electrical Characteristics (MBM-322513(1210)-Series)

MBM-322513-0052A-LF

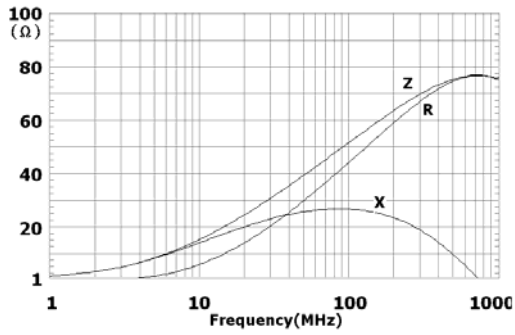

MBM-322513-0060A-LF

