


# SMD Power Inductors

## Features

- Low profile type with low Rdc and large current.
- The magnetic shielded type is suitable and high density mounting



## Applications

- Mobile Phone
- Personal Computer
- Hard Disk Drivers


## Part Number Systems

**SIRB - 7028 - 4R7 - M - LF**

(1) (2) (3) (4) (5)

(1)	Product series	(2)	Size: 7028
(3)	Inductance Value: 4R7 = 4.7uH	(4)	Inductance Tolerance:
(5)	ROHs Compliant		M = ± 20%, L = ±15%, K = ± 10%

## Shape And Dimensions

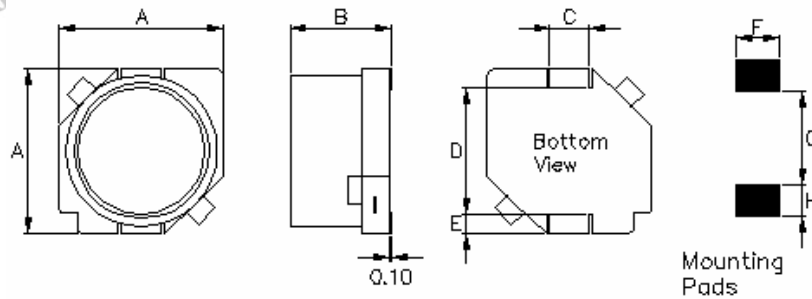

Unit: mm

Type	A	B	C	D	E	F Ref	G Ref.	H Ref.
7028	7.0 ± 0.2	2.8 ± 0.2	2.0 ± 0.1	4.9 Typ	0.9	2.2	4.9	1.5

## SMD Power Inductors

SIRB-7028-Series		ELECTRICAL CHARACTERISTICS			
Part Number	Inductance (uH)	Tolerance	L Test Frequency	Rdc ( $\Omega$ ) Max	Idc (A) Max
SIRB-7028-3R3M-LF	3.3	M	1KHZ	0.037	1.60
SIRB-7028-4R7M-LF	4.7	M	1KHZ	0.045	1.50
SIRB-7028-6R8M-LF	6.8	M	1KHZ	0.059	0.30
SIRB-7028-100M-LF	10	M	1KHZ	0.083	1.10
SIRB-7028-150M-LF	15	M	1KHZ	0.130	0.88
SIRB-7028-220M-LF	22	M	1KHZ	0.180	0.75
SIRB-7028-330M-LF	33	M	1KHZ	0.240	0.65
SIRB-7028-470M-LF	47	M	1KHZ	0.340	0.54

\* All specifications are subjected to change without prior notice.