


Common Mode Line Filter

Features

- Compact, light, weight and highly reliable
- Easily inserted into PCB



Applications

- Removal of noise in common mode
- Multifunction telephone sets
- Fax machine
- Digital equipment, etc.


Part Number Systems

CF - 759035 - 080 - LF

(1) (2) (3) (4)

(1)	Product series	(2)	Product series
(3)	Inductance value: 080 = 8uH	(4)	ROHs Compliant

Shape And Dimensions

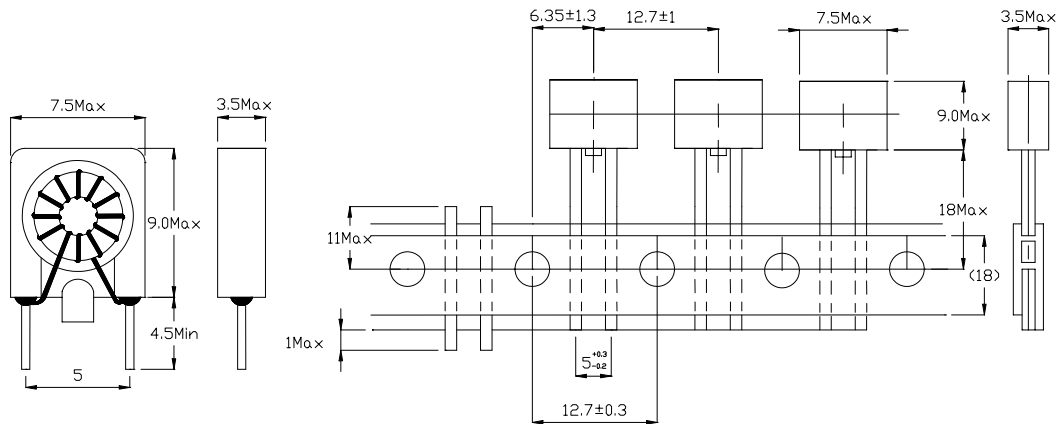

Common Mode Line Filter

CF-759035-Series		ELECTRICAL CHARACTERISTICS			
Part Number	Inductance (uH)	Freq(MHz)	Impedance (Ω) Min Z	Rated current (mA)	Rdc (m Ω) Max
CF-759035-080-LF	8 \pm 50%	300	150	500	15
CF-759035-100-LF	10 \pm 50%	200	170	500	15
CF-759035-400-LF	40 \pm 35%	60	550	500	25
CF-759035-600-LF	60 \pm 50%	40	900	500	30
CF-759035-800-LF	80 \pm 50%	30	1200	500	35
CF-759035-121-LF	120 \pm 35%	30	1600	250	95
CF-759035-151-LF	1200 \pm 35%	20	2200	250	110

* All specifications are subjected to change without prior notice.