


Common Mode Line Filter

Features

- Compact, light, weight and highly reliable
- Easily inserted into PCB

Applications

- Removal of noise in common mode
- Multifunction telephone sets
- Fax machine
- Digital equipment, etc.




Part Number Systems

CF - 758064 - 150 - LF

(1) (2) (3) (4)

(1)	Product series	(2)	Product series
(3)	Inductance value: 150 = 15uH	(4)	ROHs Compliant

Shape And Dimensions

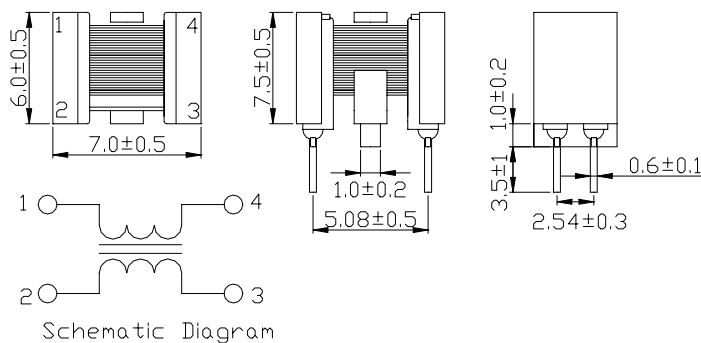

CF-758064-Series		ELECTRICAL CHARACTERISTICS			
Part Number	Inductance (uH)	Freq(MHz)	Impedance (Ω) Min Z	Rated current (mA)	Rdc (mΩ) Max
CF-758064-150-LF	15 ± 35%	100	380	500	35
CF-758064-400-LF	40 ± 35%	50	900	500	45
CF-758064-600-LF	60 ± 35%	40	1250	500	50
CF-758064-800-LF	80 ± 35%	30	1300	500	60

* All specifications are subjected to change without prior notice.